

INDUSTRIAL PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The industrial pressure transmitter EPI 8287 features the extremely robust and stable thin-film-on-steel sensor element from its well-proven predecessor EPI 8297. In combination with the new inhouse developed ASIC TX it offers a wide temperature range up to 125°C and triple overpressure safety which makes it the perfect solution for a wide range of demanding applications.



Applications

- Machine tools
- Hydraulics
- Industrial applications

Features

- Excellent long-term stability
- Completely welded steel sensor system without additional seals
- Accuracy classes 0.3%, 0.5%
- Optional: 5-fold overpressure resistance
- Optionally with housing material AISI316L

Technical Data

Measuring principle	Thin-film-on-steel	Accuracy @ 25°C typ.	± 0.5 % FS typ. ± 0.3 % FS typ.
Measuring range	0 ... 0.2 to 0 ... 600 bar 0 ... 3 to 0 ... 7500 psi	Media temperature	-40°C ... +125°C
Output signal	4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC, 0 ... 10 VDC, 0.5 ... 4.5 VDC ratiometric	Ambient temperature	-40°C ... +125°C Cable PVC: -5°C ... +60°C Cable PUR: -20°C ... +70°C Cable Raychem: -20°C ... +100°C
NLH @ 25°C (BSL) typ.	± 0.2 % FS typ.		

07/2020

Data sheet H72317p

Subject to change

Electrical connection	Male electrical connector EN 175301-803-A (DIN43650-A), Mat. PA				05		
	Male electrical connector M12x1, 5-pole, Mat. PBT				35		
	Male electrical connector Packard Metri Pack, Mat. PBT				51		
	Male electrical connector, industrial standard (contact distance 9.4 mm), Mat. PBT				01		
	Male electrical connector MIL-C 26482, 6-pole, metal ¹²⁾				02		
	Male electrical connector: DIN72585 Code 1, Mat.: PBT (Contacts Mat.: Sn) ¹³⁾				25		
	Cable PUR (Screwed cable gland PA 6-3), -20°C ... +70°C ^{8) 9)}				24		
	Cable PVC (Screwed cable gland PA 6-3), -5°C ... +60°C ^{8) 9) 10)}				22		
	Cable Raychem (Screwed cable gland PA 6-3), -20°C ... +100°C ^{8) 9) 10)}				08		
Output signal	Signal output	Load resistance	I (supply)	U (supply)			
	4 ... 20 mA	(Usupply-9 V) / 20 mA		9 ... 32 VDC	19		
	0 ... 5 VDC	> 2.5 kΩ	< 10 mA	9 ... 32 VDC	14		
	1 ... 6 VDC	> 5.0 kΩ	< 10 mA	9 ... 32 VDC	16		
	0 ... 10 VDC	> 5.0 kΩ	< 10 mA	15 ... 32 VDC	17		
	0.5 ... 4.5 VDC ratiometric	> 5.0 kΩ	< 10 mA	5 (4.75 ... 5.25) VDC	23		
Accessories	Seal FPM, -18°C ... +125°C					61	
	Seal EPDM, -40°C ... +125°C ³⁾					63	
	Seal NBR, -25°C ... +100°C ³⁾					83	
	Pressure peak damping element ø 1.0 mm, material 1.4305 ⁴⁾					40	
	Pressure peak damping element ø 0.4 mm, material 1.4305 (sensors 23, 25) resp. 1.4404 (sensors 33, 35) ⁴⁾					44	
	Female electrical plug EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C, for cable diameter 4 ... 9 mm, flammability standard UL94-V0					46	
	Female electrical plug EN 175301-803-A (DIN43650-A)/Silicone, -40°C ... +125°C, for cable diameter 4 ... 9 mm, flammability standard UL94-V0					56	
	Female electrical plug EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C, for cable diameter 4 ... 9.5 mm, flammability standard UL94-V2					58	
	Female electrical plug M12x1, 5-pole					33	
	Female electrical plug industrial standard					34	
	Special electrical connection: Pin 1 +, Pin 2 - (only for output signal 4 ... 20 mA and male electrical connector EN175301-803-A / DIN43650-A)					92	
	Special electrical connection: Pin 1 Out, Pin 2 -, Pin 3 + (only for output 14, 16, 17 and male electrical connector EN175301-803-A / DIN43650-A)					98	
	Special electrical connection: Pin 1 +, Pin 2 -, Pin 3 Out (only for output 14, 16, 17 and male electrical connector EN175301-803-A / DIN43650-A)					97	
	Special electrical connection: Pin 1 +, Pin 2 -, Pin 3 GR (only for output 4...20mA and male electrical connector M12x1, 5-pol.)					94	
	Special electrical connection: Pin 1 +, Pin 3 - (only for output 4 ... 20 mA and male electrical connector Packard Metri Pack 3-poles)					E4	
	Special electrical connection: Pin 1 +, Pin 2 out Pin 3 - (only for output signals 14, 16, 17 and male electrical connector Packard Metri Pack 3-poles)					99	
	Housing nut for electrical connection EN175301-803-A (DIN43650-A) secured with Loctite (max. 85°C)					L9	
	Cable length 1.5 m					1M	
	Cable length 3.0 m					3M	
	Cable length 5.0 m					5M	
	Multiple packaging ¹¹⁾					VM	

¹⁾ Customized pressure ranges upon request²⁾ Upon request³⁾ Only with pressure connection 17 (G1/4")⁴⁾ Not for pressure connections 10, 11, 13, 18, 24⁵⁾ Only for pressure ranges ≥ 10 bar⁶⁾ Max. allowable pressure range 60 bar at 180 bar overpressure⁷⁾ Only for pressure connections 17, 31 (upon request: 30, 42, 61) and only for sensor 23⁸⁾ Cable length see accessories (max. length 50 m, in 5-meter sections)⁹⁾ IP68, max. 3 m, Media +10°C ... +35°C¹⁰⁾ Cable length max. 3 m for pressure ranges ≤ 16 bar¹¹⁾ The order quantity must be a multiple of 50, only for electrical connections 05 and 35¹²⁾ Only for sensors 23 and 25, only for pressure connections 13, 17, 19, 53, only for output signal 4 ... 20 mA (code 19)¹³⁾ Only for sensors 23 and 25, only for pressure connections 13, 17, 19, 53¹⁴⁾ Only for sensors 23 and 25

Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Signal output	Supply [VDC]
EPI2.5A	8287 75 2517 05 0000 0000 19 44 58 61	0 ... 2.5	7.5	4 ... 20 mA	9 ... 32
EPI4.0A	8287 76 2517 05 0000 0000 19 44 58 61	0 ... 4	12	4 ... 20 mA	9 ... 32
EPI6.0A	8287 77 2517 05 0000 0000 19 44 58 61	0 ... 6	18	4 ... 20 mA	9 ... 32
EPI10.0A	8287 78 2517 05 0000 0000 19 44 58 61	0 ... 10	30	4 ... 20 mA	9 ... 32
EPI16.0A	8287 79 2517 05 0000 0000 19 44 58 61	0 ... 16	48	4 ... 20 mA	9 ... 32
EPI25.0A	8287 80 2517 05 0000 0000 19 44 58 61	0 ... 25	75	4 ... 20 mA	9 ... 32
EPI40.0A	8287 81 2517 05 0000 0000 19 44 58 61	0 ... 40	120	4 ... 20 mA	9 ... 32
EPI60.0A	8287 82 2517 05 0000 0000 19 44 58 61	0 ... 60	180	4 ... 20 mA	9 ... 32
EPI100.0A	8287 83 2517 05 0000 0000 19 44 58 61	0 ... 100	300	4 ... 20 mA	9 ... 32
EPI160.0A	8287 85 2517 05 0000 0000 19 44 58 61	0 ... 160	480	4 ... 20 mA	9 ... 32
EPI250.0A	8287 74 2517 05 0000 0000 19 44 58 61	0 ... 250	750	4 ... 20 mA	9 ... 32
EPI400.0A	8287 84 2517 05 0000 0000 19 44 58 61	0 ... 400	1000	4 ... 20 mA	9 ... 32
EPI600.0A	8287 86 2517 05 0000 0000 19 44 58 61	0 ... 600	1500	4 ... 20 mA	9 ... 32
EPI2.5V	8287 75 2517 05 0000 0000 17 44 58 61	0 ... 2.5	7.5	0 ... 10 VDC	15 ... 32
EPI4.0V	8287 76 2517 05 0000 0000 17 44 58 61	0 ... 4	12	0 ... 10 VDC	15 ... 32
EPI6.0V	8287 77 2517 05 0000 0000 17 44 58 61	0 ... 6	18	0 ... 10 VDC	15 ... 32
EPI10.0V	8287 78 2517 05 0000 0000 17 44 58 61	0 ... 10	30	0 ... 10 VDC	15 ... 32
EPI16.0V	8287 79 2517 05 0000 0000 17 44 58 61	0 ... 16	48	0 ... 10 VDC	15 ... 32
EPI25.0V	8287 80 2517 05 0000 0000 17 44 58 61	0 ... 25	75	0 ... 10 VDC	15 ... 32
EPI40.0V	8287 81 2517 05 0000 0000 17 44 58 61	0 ... 40	120	0 ... 10 VDC	15 ... 32
EPI60.0V	8287 82 2517 05 0000 0000 17 44 58 61	0 ... 60	180	0 ... 10 VDC	15 ... 32
EPI100.0V	8287 83 2517 05 0000 0000 17 44 58 61	0 ... 100	300	0 ... 10 VDC	15 ... 32
EPI160.0V	8287 85 2517 05 0000 0000 17 44 58 61	0 ... 160	480	0 ... 10 VDC	15 ... 32
EPI250.0V	8287 74 2517 05 0000 0000 17 44 58 61	0 ... 250	750	0 ... 10 VDC	15 ... 32
EPI400.0V	8287 84 2517 05 0000 0000 17 44 58 61	0 ... 400	1000	0 ... 10 VDC	15 ... 32
EPI600.0V	8287 86 2517 05 0000 0000 17 44 58 61	0 ... 600	1500	0 ... 10 VDC	15 ... 32




Specifications		
Electrical Data	Output / supply voltage	4 ... 20 mA: 24 (9...32) VDC 0 ... 5 VDC: 24 (9...32) VDC 1 ... 6 VDC: 24 (9...32) VDC 0 ... 10 VDC: 24 (15...32) VDC 0.5 ... 4.5 VDC ratiometric 10 ... 90 % U_{supply} : 5 ± 0.25 VDC
	Rise time	Typ. 1 ms / 10 ... 90 % nominal pressure
	Power-on delay time	100 ms
	Inverse-polarity protection, short-circuit strength @ 25°C during 5 min.	4 ... 20 mA: to $U_s = 32$ VDC 0 ... 10 VDC, 0 ... 5 VDC, 1 ... 6 VDC: to $U_s = 28$ VDC 0.5 ... 4.5 VDC ratiometric: to $U_s = 14$ VDC
Environmental conditions	Media temperature	-40°C ... +125°C
	Ambient temperature	-40°C ... +125°C Cable PVC: -5°C ... +60°C Cable PUR: -20°C ... +70°C Cable Raychem: -20°C ... +100°C
	Protection ¹⁾	IP65, IP67, IP68
	Humidity	Max. 95 % relative
	Vibration	15 g RMS (20...2000 Hz) acc.to EN 60068-2-64 25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C) acc.to EN 60068-2-6
	Shock	500 g / 1 ms acc.to EN 60068-2-27
EMC Protection	Emission	EN/IEC 61000-6-3
	Immunity	EN/IEC 61000-6-2
Mechanical Data	Sensor (wetted parts)	1.4542 (AISI630)
	Pressure connection (wetted parts)	1.4542 (AISI630) or 1.4404 (AISI316L)
	Housing	1.4542 (AISI630) or 1.4404 (AISI316L)
	Sealing	FPM/EPDM/NBR
	Male electrical connector	See ordering information
	Weight	appr. 80 ... 110 g
	Mounting torque	25 Nm

¹⁾ See electrical connection


Accuracy

		Measuring accuracy 0.3 % Ordering No. 23		Measuring accuracy 0.3 % Ordering no. 23/33	Measuring accuracy 0.5 % Ordering No. 25/35
Measuring range	[bar]	≥ 0.2 ≤ 0.6	> 0.6 < 2.5	≥ 2.5	≥ 2.5
	[psi]	≥ 3 ≤ 10	> 10 < 30	≥ 30	≥ 30
TEB @ -25 ... +85°C	[% FS typ.]	± 2.0	± 1.5	± 1.0	± 1.75
Accuracy @ +25°C	[% FS typ.]	± 0.8	± 0.6	± 0.3	± 0.5
NLH @ +25°C (BSL)	[% FS typ.]	± 0.2	± 0.2	± 0.2	± 0.2
TC zero point and span	[% FS/K typ.]	± 0.02	± 0.02	± 0.01	± 0.03
Long term stability 1 year	[% FS typ.]	± 0.3	± 0.2	± 0.1	
Mounting dependency with 180° rotation (vibration and shock)	[% FS max.]	0.5 mbar	0.5 mbar	0.5 mbar	bar, psi, MPa, kPa, mWC, mmWC, inchWC, %, user scale

Accuracy class 0.3 %

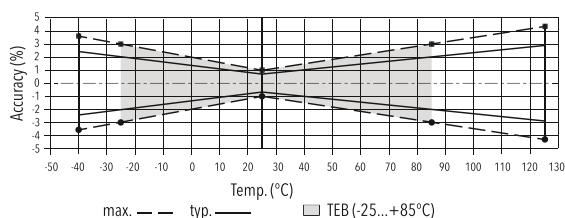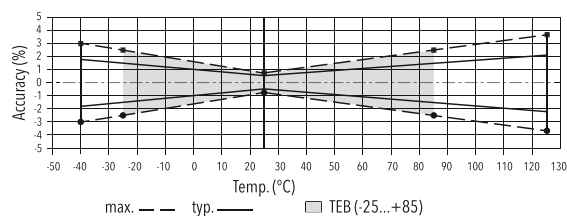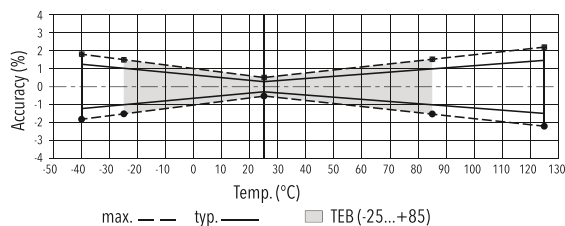 $\geq 0.2 \text{ bar} \dots \leq 0.6 \text{ bar}$  $>0.6 \text{ bar} \dots <2.5 \text{ bar}$  $\geq 2.5 \text{ bar}$ 

Accuracy class 0.5 %

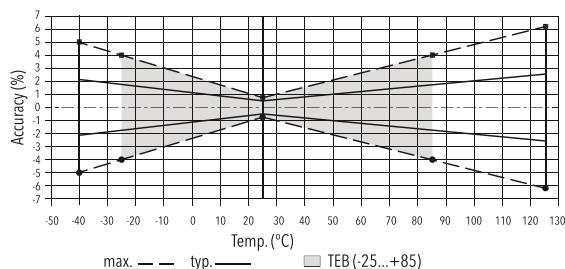

Additional information

Documents

Data sheet

www.trafag.com/H72317


Instructions

www.trafag.com/H73317


Flyer

www.trafag.com/H70692


Dimensions




8287.XX.XXXX.05.XX.XX




8287.XX.XXXX.35.XX.XX




8287.XX.XXXX.51.XX.XX




8287.XX.XXXX.01.XX.XX



8287.XX.XXXX.02.XX.XX



8287.XX.XXXX.25.XX.XX

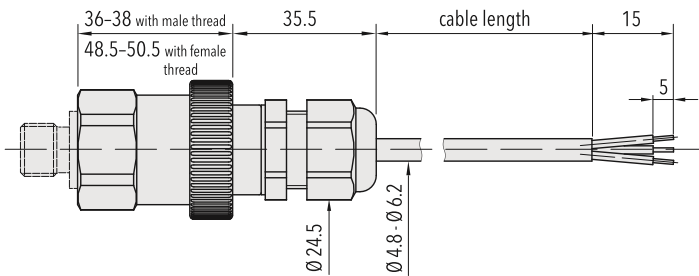

8287.XX.XXXX.24/22/08.XX.XX

H72317p



Electrical connection

Protection / electrical connection											
IP65*) (**)		IP67*) (**)		IP67*) (**)		IP65(**)		IP67*) (**)		IP69K*)	
Industrial standard EN175301-803A		M12x1 5-pole		Packard Metri Pack 3-pole		Industrial standard Contact distance 9.4 mm		MIL-C 26482		DIN 72585**) Code 1	
05		35		51		01		02		25 1)	
Output signal		Standard	92		94		E4				
		2	1	4	1	1	1	2	A		
		1	2	1	3	2	3	1	B		
		⊕	⊕	5	5			⊕	E		
		8287.xx.xxxx.xx.19									
Output signal		Standard	98	97			99				
		2	3	1	2	1	1	1			1
		3	1	3	4	3	2	2			2
		1	2	2	3	2	3	3			4
		⊖	⊖	⊖	5		⊖	⊖			3
8287.xx.xxxx.xx.14/16/17/23											

¹⁾ Only for output signal 23

*) Provided female electrical plug is mounted according to instructions

**) Ventilation via male electric plug/cable end

***) Only cable versions or female electrical plug with shield connection

Protection / electrical connection			
IP68 max. 3 m		IP68 max. 3 m	
Cable**)		Cable**)	
24/22		08	
Output signal	 8287.xx.xxxx.xx. 19	white	red
		brown	black
		yellow	green
Output signal	 8287.xx.xxxx.xx. 14/16/17/23	white	red
		green	white
		brown	black
		yellow	green