


Inlet Air Temperature	[°C]	4.00	Evaporating temperature [Dew]	[°C]	-4.00
DT [Dew]	[K]	8.00	Refrigerant		R448A
Minimum number of units in room		0	Altitude	[m]	0.0
Heat exchanger	Aluminium fin		Casing	Standard	
Fan motor feed	Standard		Type of fan motor	AC motors	
Defrost	Electric				
Selected model:1 x EP 101			ED		
Capacity	[kW]	1.29	Margin	[%]	0.0
DT [Dew]	[K]	8.0	Tot. air flow	[m³/h]	440.0
Tot. Pres.S.Lev.	[dB(A) @[m]]	37 (5m)			

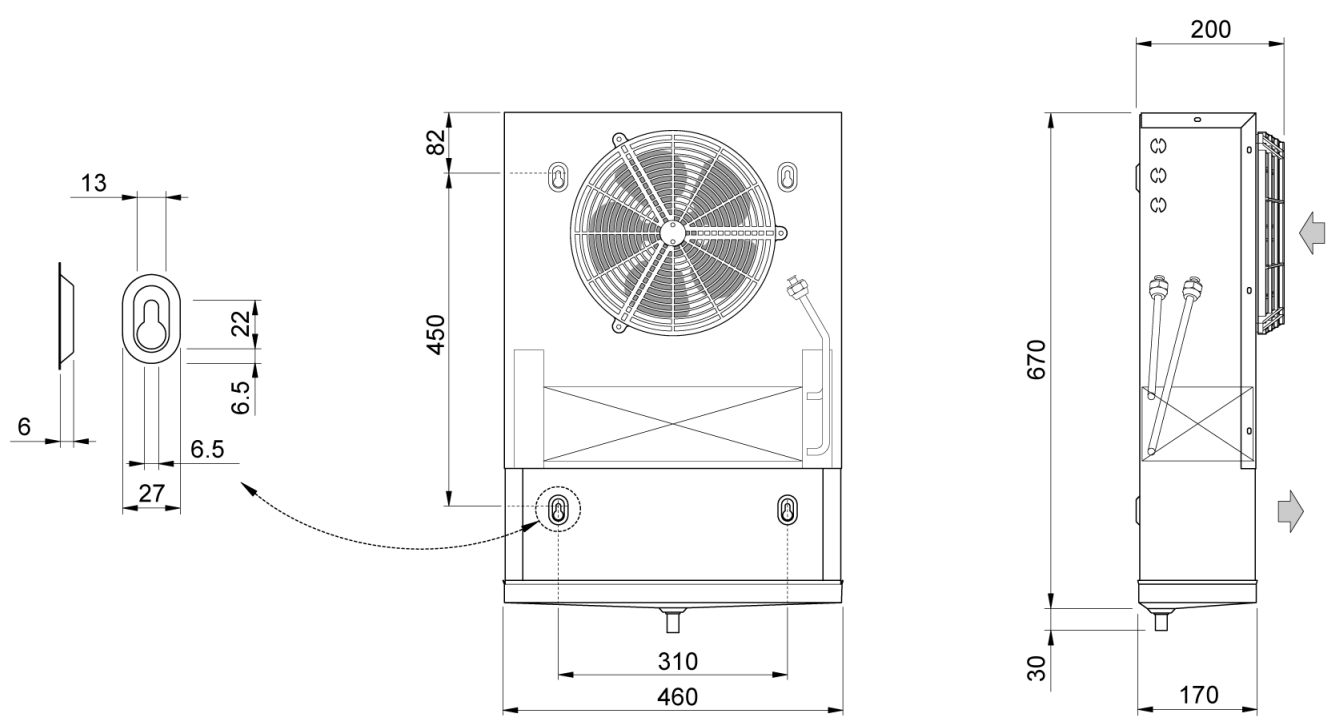

Weight	kg	7.500	PED Category		Cat I
			Design Pressure PS	[bar]	30
Internal surface	m²	0.64	External surface	m²	3.88
Inlet connection		1/2" SAE	Output connection		1/2" SAE
Total circuit capacity	dm³	0.9	Fin spacing	mm	3.5 / 7
Drain connection		16 mm			
Defrost	ED		Electric	W	300
Fan Motors	n.	1	Diameter	mm	230
Air flow	m³/h	440	Air throw	m	2.0
Feed	V	230/1/50-60	Rotation speed	rpm	1300
Fan Motor	A	0.35	Absorbed power	W	53.0
Pres.S.Lev. 5 m.	dB(A)	37			